

## High Power NPT & Lugged Type IGBT Module

### Description

DAWIN'S IGBT module devices are optimized to reduce losses and switching noise in high frequency power conditioning electrical systems. These IGBT modules are ideally suited for power inverters, motors drives and other applications where switching losses are significant portion of the total losses.


### Features

- ☞ High Speed Switching
- ☞  $BV_{CES} = 600V$
- ☞ Low Conduction Loss :  $V_{CE(sat)} = 1.95 V$  (typ.)
- ☞ Fast & Soft Anti-Parallel FWD
- ☞ Short circuit rated : Min.10uS at  $T_C=100^\circ C$
- ☞ Reduced EMI and RFI
- ☞ Isolation Type Package

### Applications

Motor Drives, High Power Inverters, Welding Machine, Induction Heating, UPS , CVCF, Robotics , Servo Controls, High Speed SMPS

### Equivalent Circuit and Package

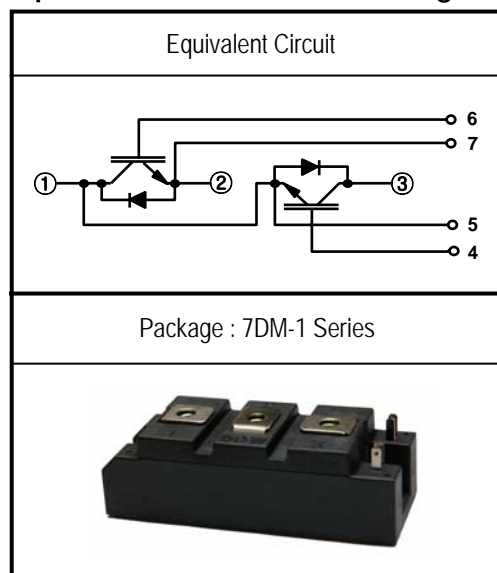

Please see the package out line information

### Absolute Maximum Ratings @ $T_j=25^\circ C$ (Per Leg)

Symbol	Parameter	Conditions	Ratings	Unit
$V_{CES}$	Collector-Emitter Voltage	-	600	V
$V_{GES}$	Gate-Emitter Voltage	-	$\pm 20$	V
$I_C$	Collector Current	$T_C = 25^\circ C$	75	A
		$T_C = 75^\circ C$	50	A
$I_{CM(1)}$	Pulsed Collector Current	-	100	A
$I_F$	Diode Continuous Forward Current	$T_C = 100^\circ C$	50	A
$I_{FM}$	Diode Maximum Forward Current	-	100	A
$T_{SC}$	Short Circuit Withstand Time	$T_C = 100^\circ C$	10	uS
$P_D$	Maximum Power Dissipation	$T_C = 25^\circ C$	275	W
$T_j$	Operating Junction Temperature	-	-40 ~ 150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-	-40 ~ 125	$^\circ C$
Viso	Isolation Voltage	AC 1 minute	2500	V
	Mounting screw Torque :M6	-	4.0	N.m
	Power terminals screw Torque :M5	-	2.0	N.m

**Electrical Characteristics of IGBT @  $T_C=25^\circ\text{C}$  (unless otherwise specified)**

Symbol	Parameter	Conditions	Values			Unit
			Min.	Typ.	Max.	
$BV_{CES}$	C - E Breakdown Voltage	$V_{GE} = 0V, I_C = 1.0mA$	600	-	-	V
$\Delta BV_{CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	$V_{GE} = 0V, I_C = 1.0mA$	-	0.6	-	$V/^\circ\text{C}$
$V_{GE(th)}$	G - E threshold voltage	$I_C = 500\mu A, V_{CE} = V_{GE}$	4	-	7	V
$I_{CES}$	Collector cutoff Current	$V_{CE} = 600V, V_{GE} = 0V$	-	-	500	$\mu A$
$I_{GES}$	G - E leakage Current	$V_{GE} = \pm 20V$	-	-	$\pm 100$	nA
$V_{CE(sat)}$	Collector to Emitter saturation voltage	$I_C = 50A, V_{GE} = 15V @ T_C = 25^\circ\text{C}$	-	1.95	2.5	V
		$I_C = 50A, V_{GE} = 15V @ T_C = 100^\circ\text{C}$	-	2.2	-	V
$C_{ies}$	Input capacitance	$V_{GE} = 0V, f = 1MHz$	-	3300	-	pF
$C_{oes}$	Output capacitance	$V_{CE} = 30V$	-	750	-	pF
$C_{res}$	Reverse transfer capacitance		-	100	-	pF
$t_{d(on)}$	Turn on delay time	$V_{CC} = 300V, I_C = 50A$	-	30	-	nS
$t_r$	Turn on rise time	$V_{GE} = 15V$	-	60	-	nS
$t_{d(off)}$	Turn off delay time	$R_G = 18\Omega$	-	90	-	nS
$t_f$	Turn off fall time	Inductive Load	-	90	150	nS
$E_{on}$	Turn on Switching Loss		-	4.0	-	mJ
$E_{off}$	Turn off Switching Loss		-	2.33	-	mJ
$E_{ts}$	Total Switching Loss		-	7	-	mJ
$T_{sc}$	Short Circuit Withstand Time	$V_{CC} = 300V, V_{GE} = 15V, R_G = 18\Omega$ $@ T_C = 100^\circ\text{C}$	10	-	-	$\mu S$
$Q_g$	Total Gate Charge	$V_{CC} = 300V$	-	300	-	nC
$Q_{ge}$	Gate-Emitter Charge	$V_{GE} = 15V$	-	40	-	nC
$Q_{gc}$	Gate-Collector Charge	$I_C = 50A$	-	120	-	nC

**Electrical Characteristics of FRD @  $T_c=25^\circ\text{C}$  (unless otherwise specified)**

Symbol	Parameter	Conditions	Values			Unit	
			Min.	Typ.	Max.		
$V_{FM}$	Diode Forward Voltage	$I_F=50\text{A}$	$T_c = 25^\circ\text{C}$	-	1.4	2.0	V
			$T_c = 100^\circ\text{C}$	-	1.3	-	
$t_{rr}$	Diode Reverse	$I_F=50\text{A}, V_R=300\text{V}$ $di/dt= -200\text{A}/\mu\text{S}$	$T_c = 25^\circ\text{C}$	-	85	-	nS
	Recovery Time		$T_c = 100^\circ\text{C}$	-	100	-	
$I_{rr}$	Diode Peak Reverse		$T_c = 25^\circ\text{C}$	-	9	-	A
	Recovery Current		$T_c = 100^\circ\text{C}$	-	13	-	
$Q_{rr}$	Diode Reverse		$T_c = 25^\circ\text{C}$	-	180	-	nC
	Recovery Charge		$T_c = 100^\circ\text{C}$	-	550	-	

**Thermal Characteristics and Weight**

Symbol	Parameter	Conditions	Values			Unit
			Min.	Typ.	Max.	
$R_{\theta JC}$	Junction-to-Case(IGBT Part, Per 1/2 Module)		-	-	0.45	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Junction-to-Case(DIODE Part, Per 1/2 Module)		-	-	0.8	$^\circ\text{C}/\text{W}$
$R_{\theta CS}$	Case-to-Sink (Conductive grease applied)		0.05	-	-	$^\circ\text{C}/\text{W}$
Weight	Weight of Module		-	-	200	g

Performance Curves

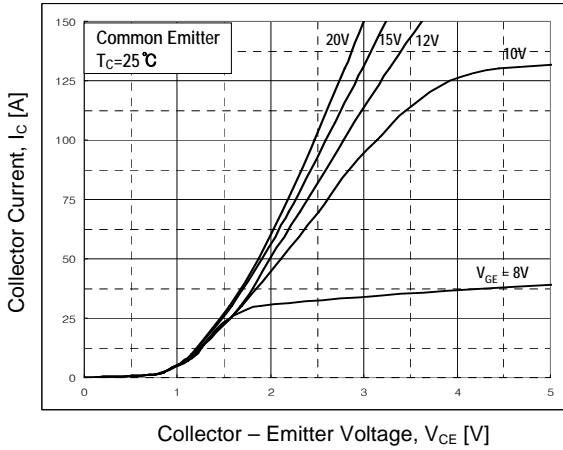


Fig 1. Typical Output characteristics

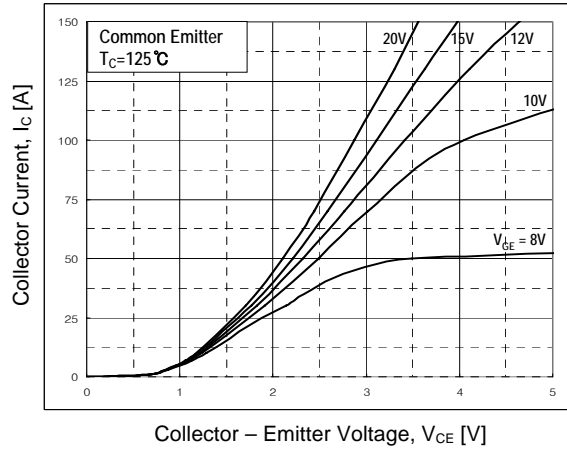


Fig 2. Typical Output characteristics

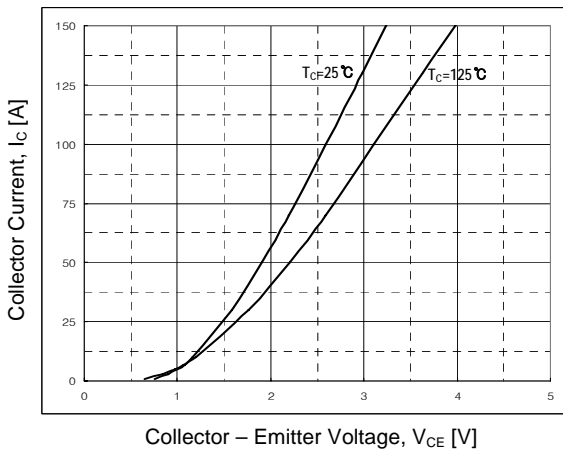


Fig 3. Typical Saturation Voltage characteristics

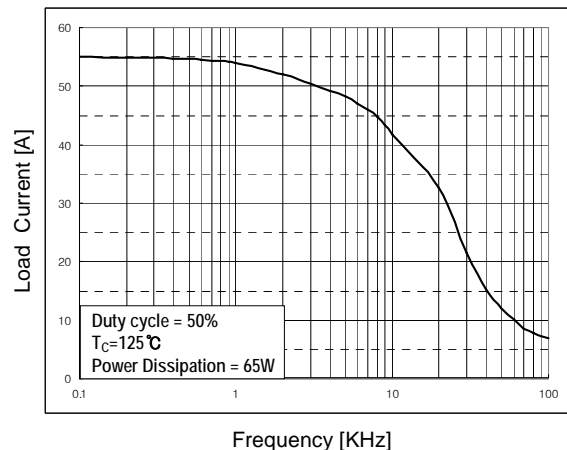


Fig 4. Load Current vs. Frequency

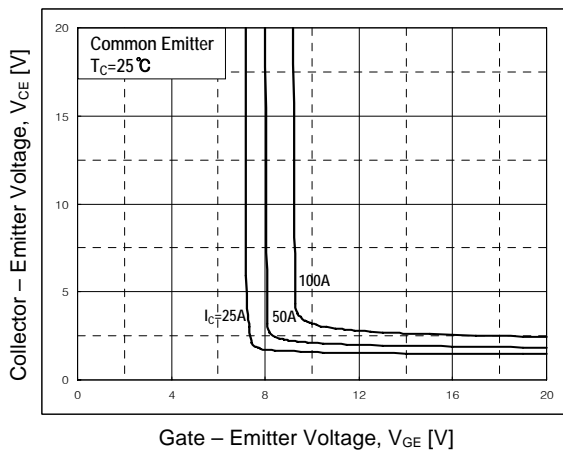


Fig 5. Typical Saturation Voltage vs.  $V_{GE}$



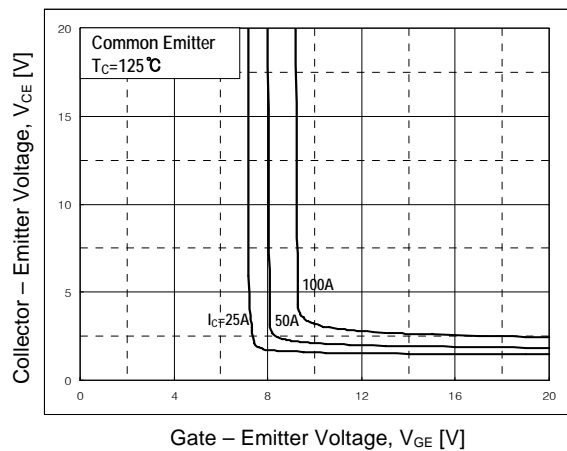



Fig 6. Typical Saturation Voltage vs.  $V_{GE}$

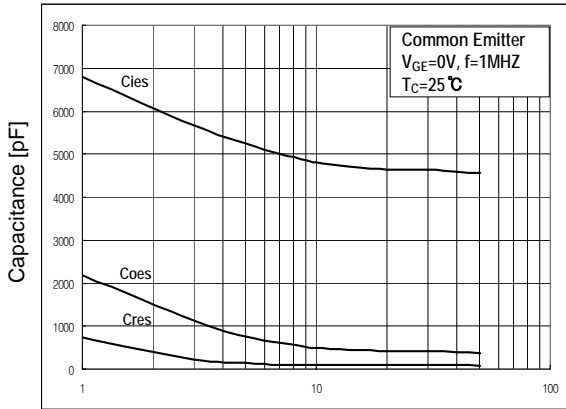


Collector - Emitter Voltage,  $V_{CE}$  [V]  
**Fig 7. Capacitance characteristics**

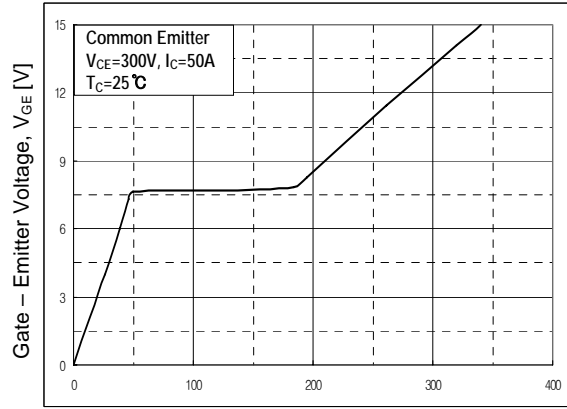


Gate Charge,  $Q_g$  [nC]  
**Fig 8. Gate Charge characteristics**

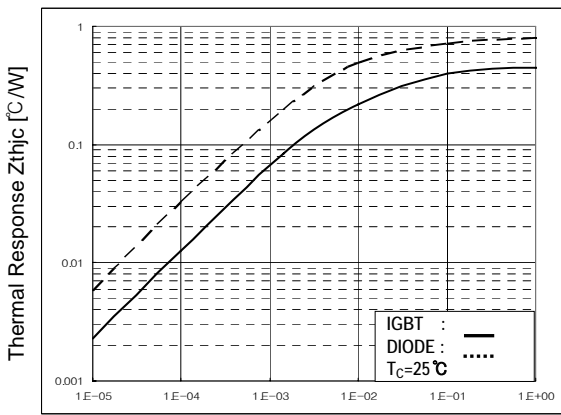


Rectangular Pulse Duration Time [sec]  
**Fig 9. Transient Thermal Impedance**

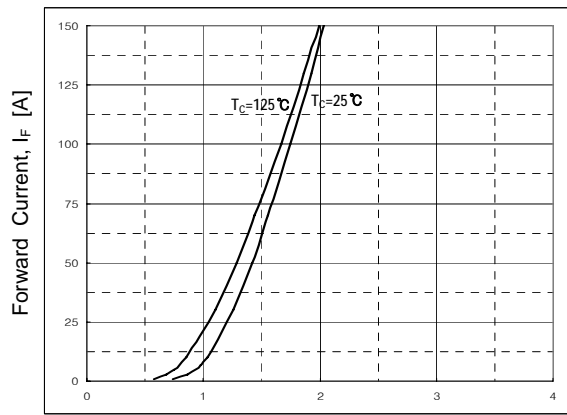

Forward Drop Voltage,  $V_F$  [V]  
**Fig 10. Forward characteristics**

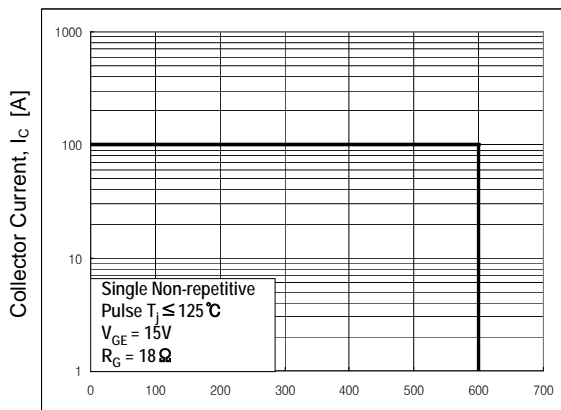


Collector-Emitter Voltage,  $V_{CE}$  [V]  
**Fig 11. RBSOA Characteristic**

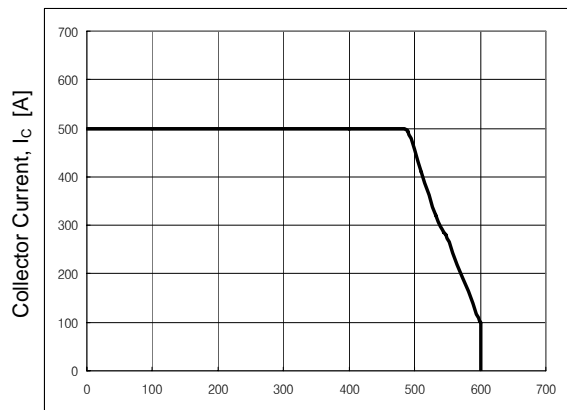

Collector-Emitter Voltage,  $V_{CE}$  [V]  
**Fig 12. SCSOA Characteristic**

Package Out Line Information

7DM-1

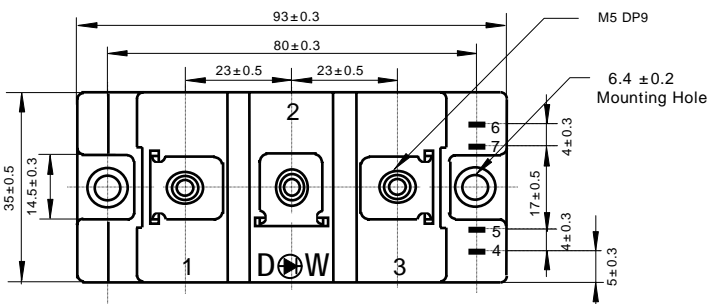

Dimensions in mm

